

PRODUCT HIGHLIGHTS

- Dual load capacities: 230kg/350kg.
- 48V/420Ah LFP/LA battery.
- AWD driven & AC power make the gradeability enhance 40%.
- G-valve technology makes better energy efficiency.




NAB22EJ 20m Electric Articulating Boom Lifts

Technical parameters



Model	NAB22EJ
Specifications	
Max. Working Height	22.5m
Max. Platform Height	20.5m
Max. Up and Over Clearance	9.4m
Max. Working Radius	11.8m
A Platform Width	0.76m
B Platform Length	1.8m
C Height-Stowed	2.38m
D Length-Stowed	8.49m
E Width	2.49m
F Wheelbase	2.5m
Ground Clearance-Center	0.3m
Standard container transportation	
Productivity	
Max. Lift Capacity	230kg(unlimited)/350kg(limited)
Platform Occupancy	2/3
Platform Rotation	±80°
Turntable Rotation	360°continuous
Vertical jib Rotation (up/down)	±70°
Drive Speed - Stowed	5.0km/h
Gradeability-Stowed	45%
Max. Working Angle	3°
Turning Radius (outside)	4.18m
Drive and Steer	4x2
Weight	10000kg
Tire	33x12-20
Power	
Battery	48V/420Ah
Control Voltage	12V
Pump Power	12kw
Drive Motor	3.3kw
Charger	48V/60A
Hydraulic Tank	105L
Emergency Power System	12V
Optional	
LFP Battery	Optional
Solid Non-marking Tires	Optional

20m Electric Articulating Boom Lifts

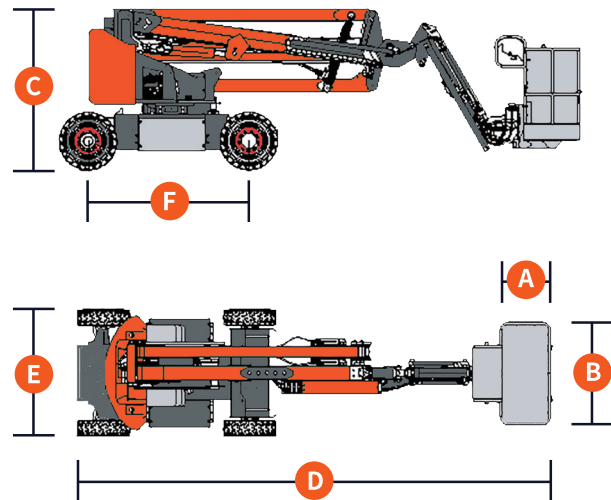

Working Range of 20m Electric Articulating Boom Lifts

